

Dimmer

Art.no.: 18-2526 Model: ZD701DB: 1 GANG 1 WAYY 400W DIMMER
18-2527 ZD702DB: 2 GANG 2 WAY 400W DIMMER

Please read the entire instruction manual before using and save it for future use. We apologise for any text or photo errors and any changes of technical data. If you have any questions concerning technical problems please contact our Customer Service Department.



Important

- Read the installation instructions before beginning the installation.
- This product **MUST** be earthed in accordance with the correct IEE wiring regulations. (Metal Plates Only).
- To prevent any chemical reaction, fix the plastic wall gasket. (Metal Plates Only).
- This dimmer must only be used with tungsten filament lamps and the total load must be within the range of the dimmer. The dimmer is not suitable for use with fluorescent lights, motors on transformers (low voltage lighting).
- Minimum wall box depth to be 25mm. Remove or bend back lugs not being used.

Installation procedure

1. Switch off the power at the mains.
 2. Unscrew remaining screws of the existing switch from wall box to expose connections at the rear.
 3. Ensure no mains voltage is present by testing with a 240 Volt test lamp.
 4. Make a note of the wiring before disconnecting wires from the switch terminals.
 5. Ensure that the wall box is free of plaster lumps or projecting screws in the central area of the box.
 6. Connect the dimmer using the terminals as noted from the old switch in accordance with the diagrams shown.
 7. Ensure that the screws in the terminals are tightened securely and no bare wires protrude from the terminals
 8. Put the dimmer back in position ensure that no cables are trapped beneath plate fixing screws.
 9. Switch on the mains supply and switch on the dimmer switch by pushing/turning the control knob, turn the knob to achieve desired lighting level.
- 1 way dimmer switch used when lights are switched from just one position.
2 way dimmer are for switching from more than one position. Dimmer must replace only one of the 2-way switches.

These accessories must only be installed by a competent person.

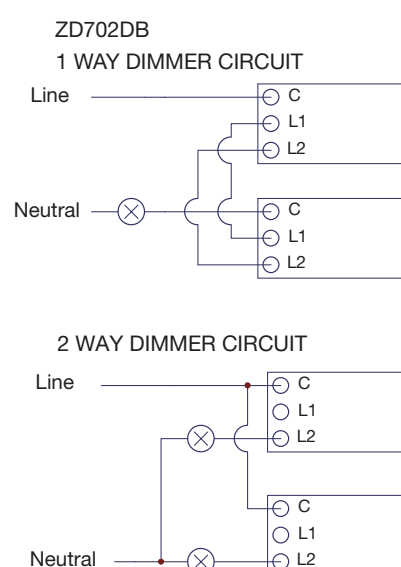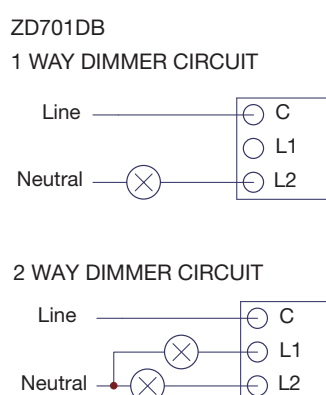

Technical details

ZD200A, ZD400A: 10A, 250V~

Disposal

Follow local ordinances when disposing of this product. If you are unsure about how to dispose of this product contact your municipality.