

GSM SECURITY SYSTEM

Vesta EZ Home Application

SVENSKA

- iOS..... 2-4
- Android..... 5-7


ENGLISH

- iOS..... 8-10
- Android..... 11-13

1.1. Vesta EZ Home för iOS



Vesta EZ Home för iOS stödjer alla grundläggande funktioner där mobilapplikationen skickar ett SMS för att fjärrstyra kontrollpanelen. Mobilapplikationen kan inte hantera inkommande SMS från kontrollpaneler. Detta beror på begränsningar i iOS som förbjuder inkommande SMS från att kommunicera med mobilapplikationen.

Tryck på **Vesta EZ Home** ikonen för att starta mobilapplikationen.

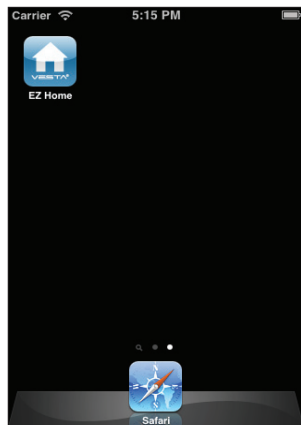

1.2. Lägga till kontrollpanel

Vid uppstart kommer man direkt till listan med dina kontrollpaneler. Lägg till en ny kontrollpanel genom att trycka på + ikonen uppe i högra hörnet.

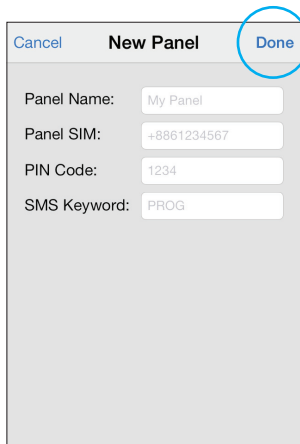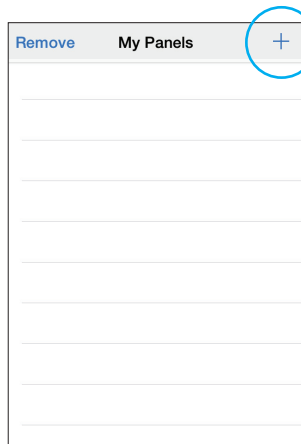

Ange den information som krävs om kontrollpanelen och tryck sedan på **Done** för att spara.


Nu ska den nya kontrollpanelen visas i listan.

Tryck på den nya kontrollpanelen i listan för att fortsätta.

Personlig PIN-kod och SMS-nyckelord (SMS Keyword) kommer att inkluderas i varje SMS-kommando som skickas för att kontrollpanelen ska kunna godkänna kommandot.

1.3. Redigera kontrollpanel


Redigera kontrollpanelen genom att trycka på **Edit**.

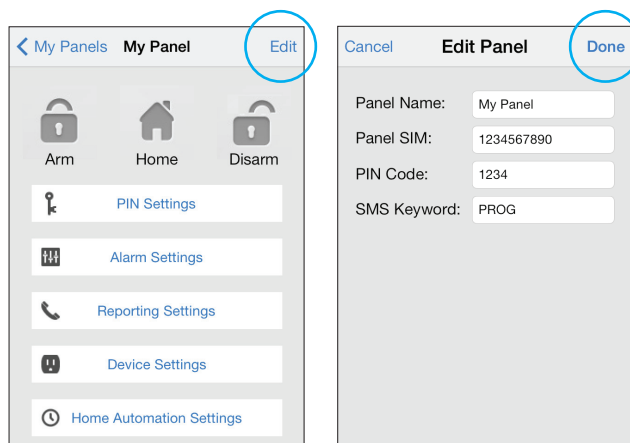

Redigera informationen och tryck på **Done** för att spara.


1.4. Ta bort kontrollpanel

Om du vill ta bort en kontrollpanel trycker du på **Remove**. Tryck sedan på  ikonen följt av **Delete** för att bekräfta borttagningen.

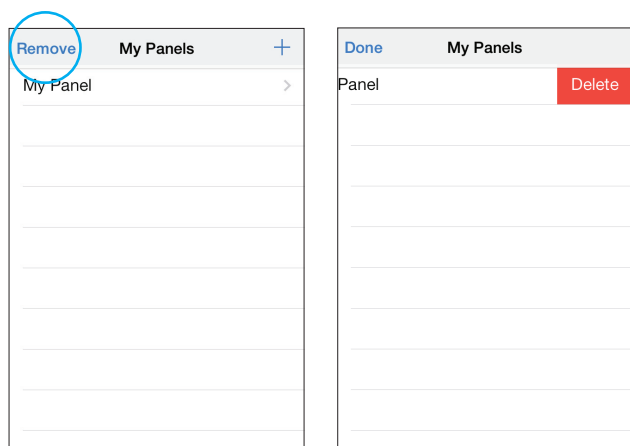

1.5. Tillkoppla / fråkoppla


Om du vill ändra systemläge trycker man på ikonen **Arm**, **Home** eller **Disarm**. Ett nytt SMS skapas. Skicka SMS-meddelandet för att utföra kommandot i kontrollpanelen.

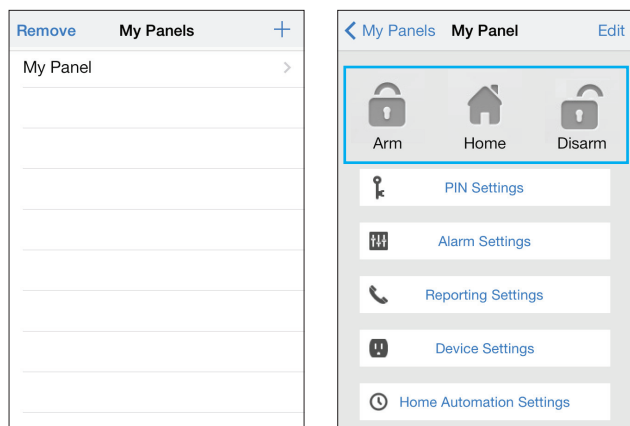

1.6. PIN-koder

I menyn "PIN Setting" kan man redigera PIN-koder för användare och SMS-nyckelord (SMS Keyword).

Välj den information som du vill redigera. Ange informationen och tryck på **Save**. Ett nytt SMS skapas. Skicka SMS-meddelandet för att utföra kommandot i kontrollpanelen.

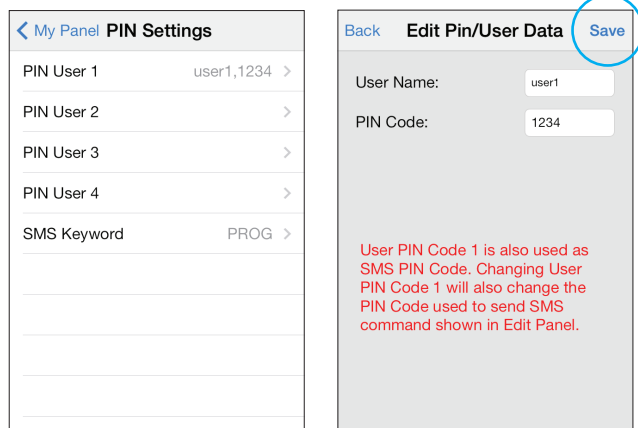


Radera PIN-koder genom att lämna inmatningsfältet tomt och spara inställningen. PIN-kod 1 kan inte tas bort.

1.7. Systeminställningar

I menyn "Alarm Settings" kan man redigera systemrelaterade inställningar i kontrollpanelen.

Välj den funktion och det värde som du vill redigera och tryck sedan på **Back** för att spara och återgå till menyn.

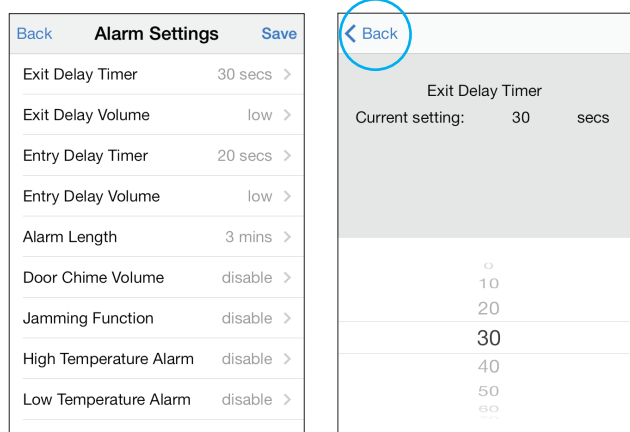


När alla inställningar är gjorda trycker man på **Save**. Ett nytt SMS skapas. Skicka SMS-meddelandet för att utföra kommandot i kontrollpanelen.

1.8. Rapportinställningar

I menyn "Reporting Settings" kan man redigera rapportinställningarna.

Välj den rapportplats som du vill redigera och skriv in ett telefonnummer och välj rapporttyp. Endast SMS (CID), SMS (Text), GSM (CID) och Voice (Röst) rapportering kan väljas.

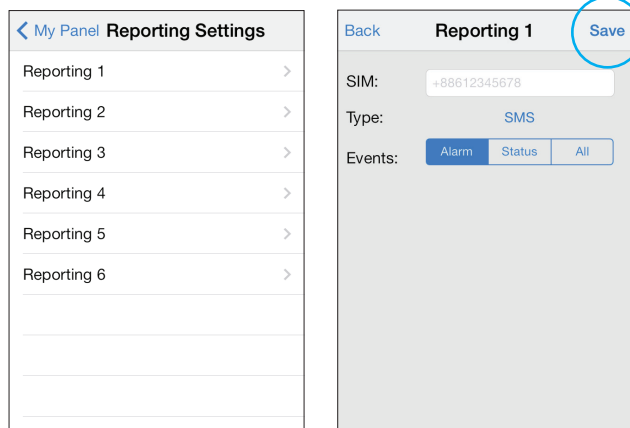

Tryck sedan på **Save**. Ett nytt SMS skapas. Skicka SMS-meddelandet för att utföra kommandot i kontrollpanelen.

Radera inlagda telefonnummer genom att lämna inmatningsfältet tomt och spara inställningen.


1.9. Redigera enhet

I menyn "Edit Device" kan man redigera namn och attribut för inlagda enheter.

Välj zonnummer för enheten du vill redigera. Namnge enheten och välj attribut. Endast "Burglar/Perimeter", "Home Omit/Interior" och "Entry" kan ställas in via mobilapplikationen.

Man kan även välja att endast redigera namnet och låta fältet med attribut vara tomt. Detta alternativ kan med fördel användas för de enheter som kräver en annan attribut än de som är möjliga att ställa in via mobilapplikationen.

Tryck sedan på **Save**. Ett nytt SMS skapas. Skicka SMS-meddelandet för att utföra kommandot i kontrollpanelen.

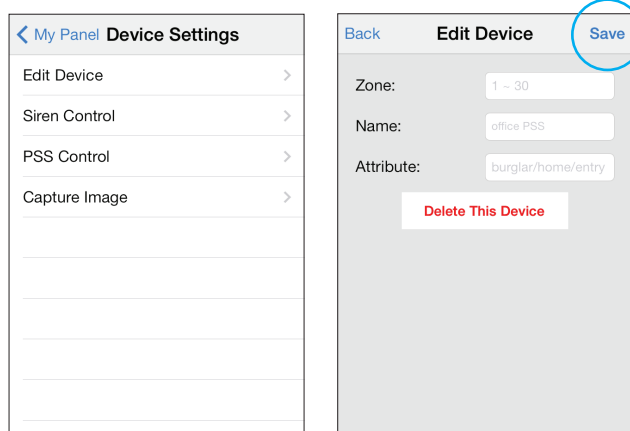

Man kan även trycka på **Delete This Device** för att ta bort enheten från kontrollpanelen.

1.10. Inställningar för extern sirén

I menyn "Siren Control" kan man ändra inställningarna för externa siréner.

Välj den funktion och ange ett värde.

Tryck sedan på **Send**. Ett nytt SMS skapas. Skicka SMS-meddelandet för att utföra kommandot i kontrollpanelen.

1.12. Stillbilder

I menyn "Capture Image" kan man manuellt begära att ett en PIR-kamera tar en bild. Bilden kommer att skickas till mottagare som är inlagda under inställningen "Bilduppladdning/Media Upload" i kontrollpanelen.

Ange zonnummer för PIR-kameran som ska ta en bild och tryck sedan på **Capture Image**. Ett nytt SMS skapas. Skicka SMS-meddelandet för att utföra kommandot i kontrollpanelen.

1.11. Fjärrstyra apparatmoduler

I menyn "PSS Control" kan man styra apparatmoduler (PSS) som är inlagda i kontrollpanelen.

Välj kanalgrupp och ange att slå "på/av" kanalgruppen.

Tryck sedan på **Save**. Ett nytt SMS skapas. Skicka SMS-meddelandet för att utföra kommandot i kontrollpanelen.

Man kan inte lägga till nya apparatmoduler i kontrollpanelen via mobilapplikationen.

1.13. Regler för hemautomation

I menyn "Home Automation Settings" kan man ställa in regler för automatiserad styrning av apparatmoduler (PSS).

Automatisk styrning av apparatmoduler kan styras beroende på systemläge, temperatur, larmtyp och tid.

Tryck sedan på **Save**. Ett nytt SMS skapas. Skicka SMS-meddelandet för att utföra kommandot i kontrollpanelen.

För styrning via "systemläge" är kanalgruppen begränsad till endast nummer 1.

För styrning via "temperatur/larmtyp/tid" kan man välja valfri kanalgrupp.

2.1. Vesta EZ Home för Android


Vesta EZ Home för Android stödjer alla grundläggande funktioner där mobilapplikationen skickar ett SMS för att fjärrstyra kontrollpanelen. Mobilapplikationen kan även synkronisera med kontrollpanelens nuvarande inställningar genom att ta emot information via SMS.

Tryck på Vesta EZ Home ikonen för att starta mobilapplikationen.



2.2. Lägga till kontrollpanel

Vid uppstart kommer man direkt till listan med dina kontrollpaneler. Lägg till en ny kontrollpanel genom att trycka på **ADD** uppe i högra hörnet.

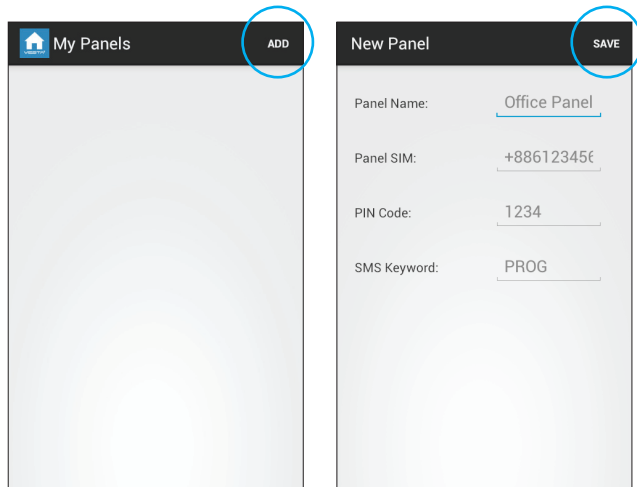

Ange den information som krävs om kontrollpanelen och tryck sedan på **SAVE** för att spara.


Nu ska den nya kontrollpanelen visas i listan.

Tryck på den nya kontrollpanelen i listan för att fortsätta.

Personlig PIN-kod och SMS-nyckelord (SMS Keyword) kommer att inkluderas i varje SMS-kommando som skickas för att kontrollpanelen ska kunna godkänna kommandot.

2.3. Redigera kontrollpanel


Redigera kontrollpanelen genom att trycka på **EDIT**.

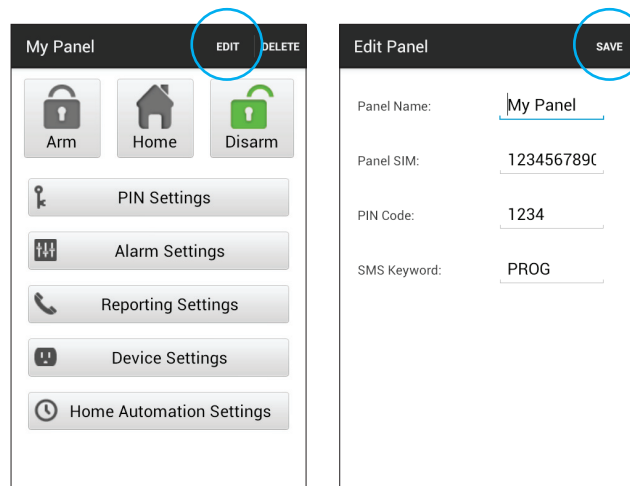

Redigera informationen och tryck på **SAVE** för att spara.


2.4. Ta bort kontrollpanel

Om du vill ta bort en kontrollpanel trycker du på **DELETE**. Tryck sedan på **OK** för att bekräfta borttagningen.

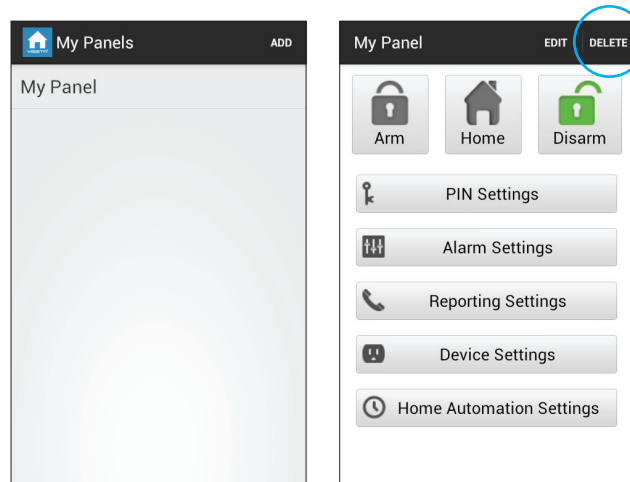

2.5. Tillkoppla / frånkoppla


Om du vill ändra systemläge väljer du ikonen **Arm**, **Home** or **Disarm**. Mobilapplikationen skickar nu ett SMS-kommando till kontrollpanelen.

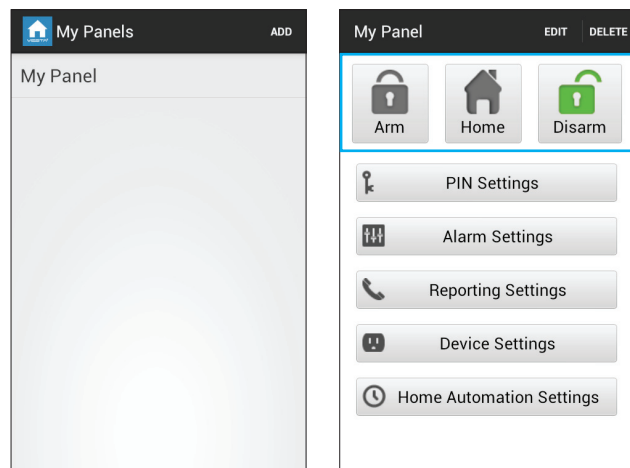

2.6. PIN-koder

I menyn "PIN Setting" kan man redigera PIN-koder för användare och SMS-nyckelord (SMS Keyword).

Välj den information som du vill redigera. Ange informationen och tryck på **SAVE**. Mobilapplikationen skickar nu ett SMS-kommando till kontrollpanelen.

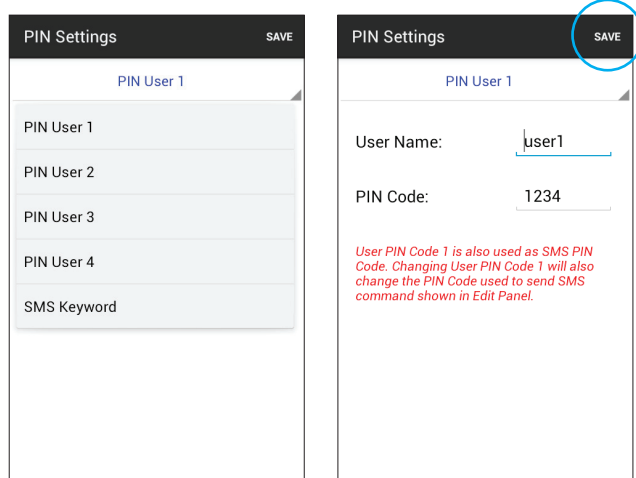


Delete the User PIN code by keeping the input field blank and save the setting. User PIN Code 1 cannot be deleted.

2.7. Systeminställningar

I menyn "Alarm Settings" kan man redigera systemrelaterade inställningar i kontrollpanelen.

Redigera önskade funktioner och värden.

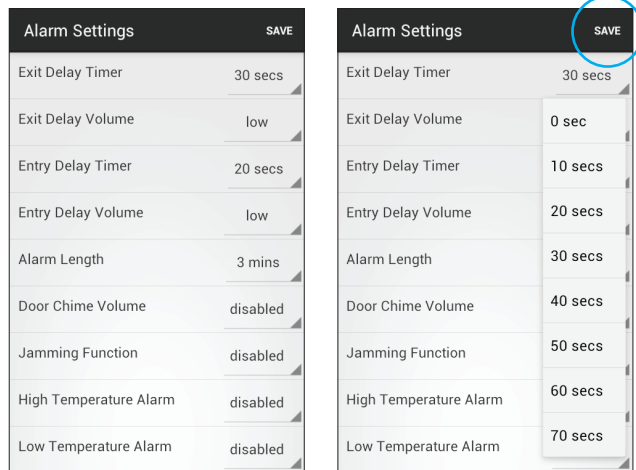


När alla inställningar är gjorda trycker man på **SAVE**. Mobilapplikationen skickar nu ett SMS-kommando till kontrollpanelen.

2.8. Rapportinställningar

I menyn "Reporting Settings" kan man redigera rapportinställningarna.

Välj den rapportplats som du vill redigera och skriv in ett telefonnummer och välj rapporttyp. Endast SMS (CID), SMS (Text), GSM (CID) och Voice (Röst) rapportering kan väljas.

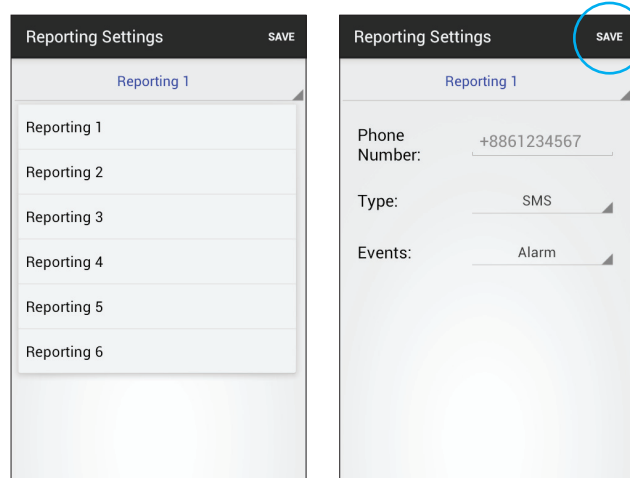

Tryck sedan på **SAVE**. Mobilapplikationen skickar nu ett SMS-kommando till kontrollpanelen.

Radera inlagda telefonnummer genom att lämna inmatningsfältet tomt och spara inställningen.


2.9. Redigera enhet

I menyn "Edit Device" kan man redigera namn och attribut för inlagda enheter.

Välj zonnummer för enheten du vill redigera. Namnge enheten och välj attribut. Endast "Burglar/Perimeter", "Home Omit/Interior" och "Entry" kan ställas in via mobilapplikationen.

Man kan även välja att endast redigera namnet och låta fältet med attribut vara tomt. Detta alternativ kan med fördel användas för de enheter som kräver en annan attribut än de som är möjliga att ställa in via mobilapplikationen.

Tryck sedan på **SAVE**. Mobilapplikationen skickar nu ett SMS-kommando till kontrollpanelen.

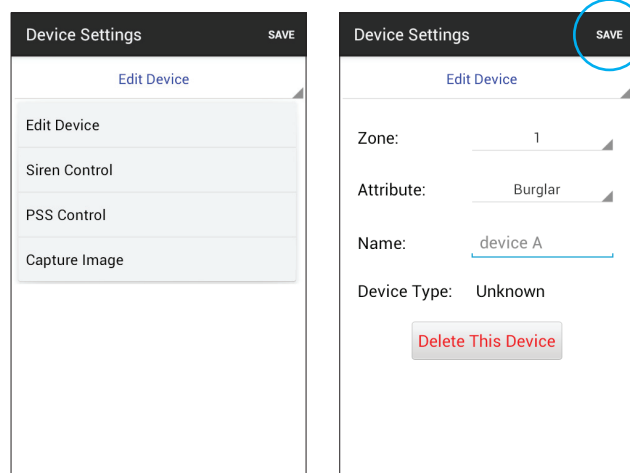


Man kan även trycka på **Delete This Device** för att ta bort enheten från kontrollpanelen.

2.10. Inställningar för extern sirén

I menyn "Siren Control" kan man ändra inställningarna för externa siréner.

Välj funktion och nytt värde.

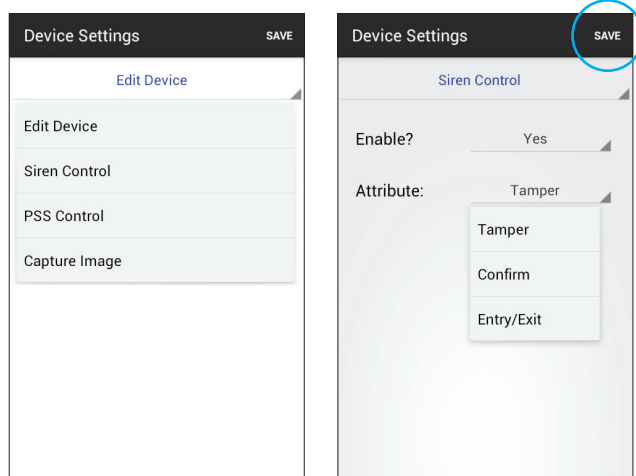


Tryck sedan på **SAVE**. Mobilapplikationen skickar nu ett SMS-kommando till kontrollpanelen.

2.11. Fjärrstyra apparatmoduler

I menyn "PSS Control" kan man styra apparatmoduler (PSS) som är inlagda i kontrollpanelen.

Välj kanalgrupp och ange att slå "på/av" kanalgruppen.

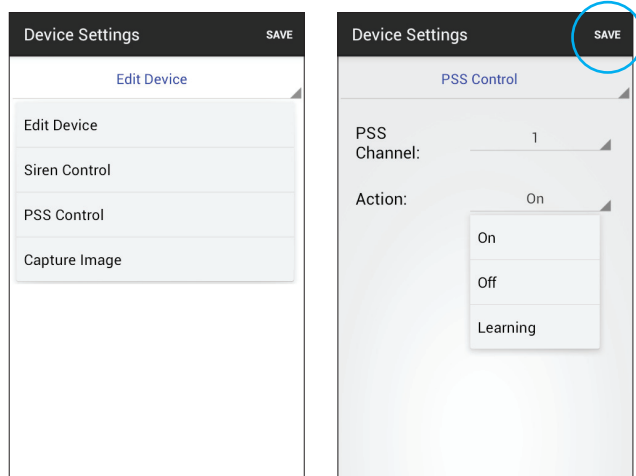


Tryck sedan på **SAVE**. Mobilapplikationen skickar nu ett SMS-kommando till kontrollpanelen.

Man kan inte lägga till nya apparatmoduler i kontrollpanelen via mobilapplikationen.

2.12. Stillbilder

I menyn "Capture Image" kan man manuellt begära att ett en PIR-kamera tar en bild. Bilden kommer att skickas till mottagare som är inlagda under inställningen "Bilduppladdning/Media Upload" i kontrollpanelen.

Ange zonnummer för PIR-kameran som ska ta en bild och tryck sedan på **SAVE**. Mobilapplikationen skickar nu ett SMS-kommando till kontrollpanelen.

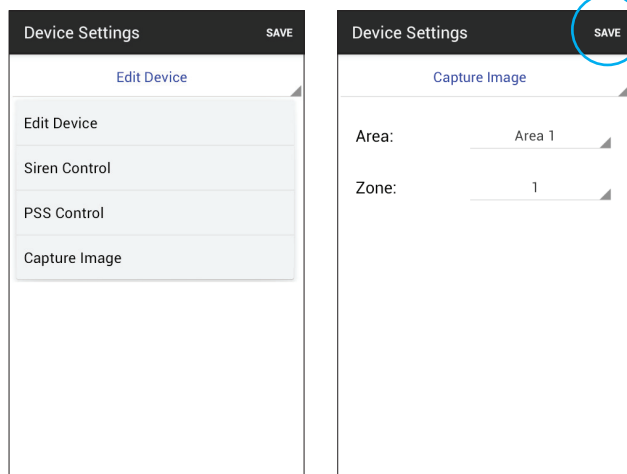


2.13. Regler för hemautomation

I menyn "Home Automation Settings" kan man ställa in regler för automatiserad styrning av apparatmoduler (PSS).

Automatisk styrning av apparatmoduler kan styras beroende på systemläge, temperatur, larmtyp och tid.

Tryck sedan på **SAVE**. Mobilapplikationen skickar nu ett SMS-kommando till kontrollpanelen.

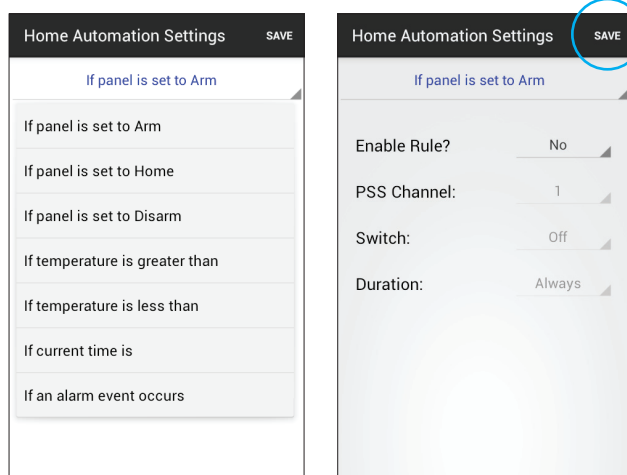


För styrning via "systemläge" är kanalgruppen begränsad till endast nummer 1.

För styrning via "temperatur/larmtyp/tid" kan man välja valfri kanalgrupp.

1.1. Vesta EZ Home for iOS


The iOS version of Vesta EZ Home application supports all SMS command functions except SMS commands which inquire information from the control panel. This is due to the limit of the iOS system, which prohibits incoming SMS message from accessing application data.

Select the Vesta EZ Home icon to start the application.

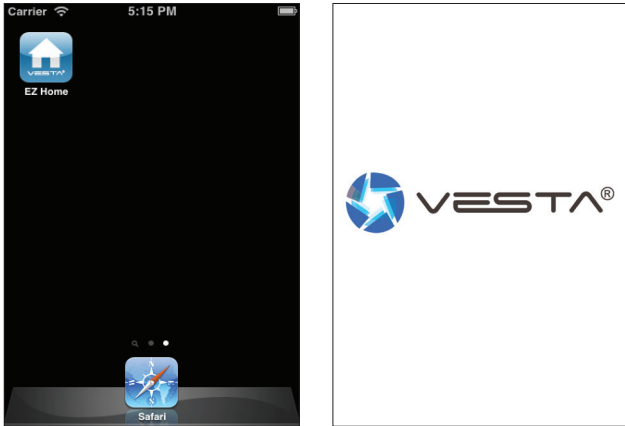

1.2. Add New Control Panel

Upon starting the application, you will first enter the control panel selection menu. For first time user, you need to first enter your control panel information, please select the + icon.

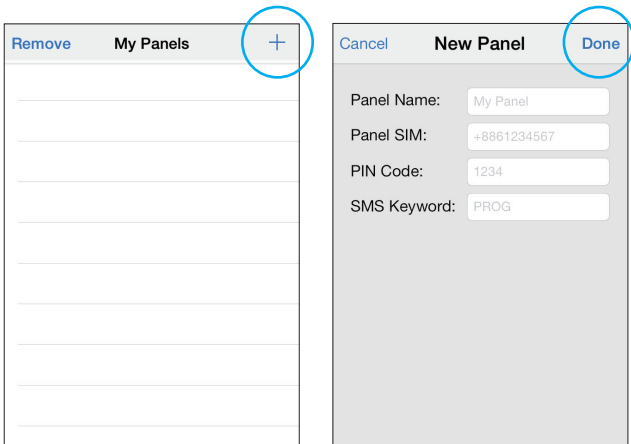


Enter the control panel information and press **Done** to save and confirm

You will now return to control panel selection menu. The new control panel you have entered will be displayed in the list. Select the control panel to proceed to edit SMS commands for the panel.

The PIN Code and SMS Keyword entered in Panel Information are included in every SMS command sent with the app for the Control Panel to verify the SMS command

1.3. Edit Control Panel


Edit the control panel information by pressing **Edit**.

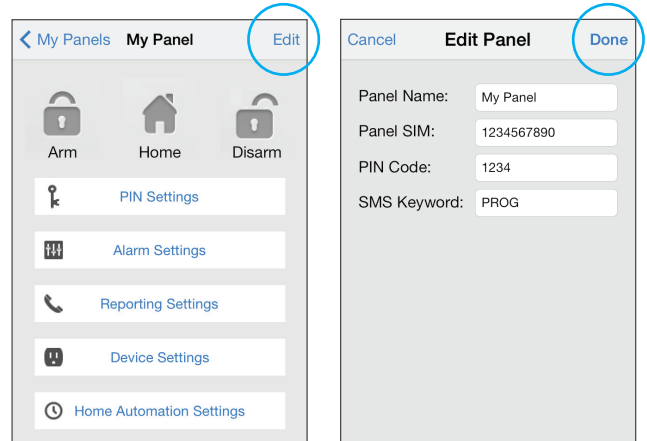

Enter the panel information. Press **Done** to save and confirm.


1.4. Remove Control Panel

If you want to remove the panel, press **Remove**. Press the  icon, then **Delete** to remove the panel from the application.

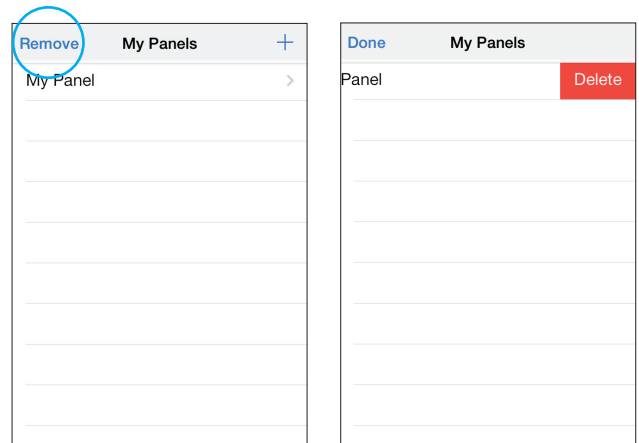

1.5. Away Arm / Home Arm / Disarm

To change system mode, select the icon for **Arm**, **Home** or **Disarm**. A new SMS message will be created. Send the SMS message to execute the command in the control panel.

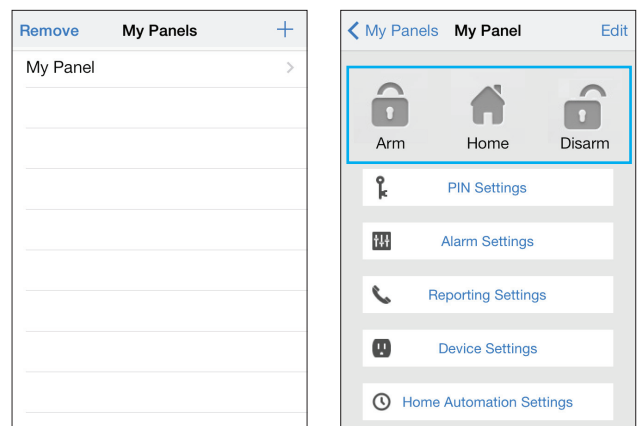

1.6. PIN Settings

The PIN Setting Menu allows you to edit User PIN Codes and SMS Keyword.

Select the information you want to edit, enter the information and press **Save**. A new SMS message will be created. Send the SMS message to execute the new settings in the control panel.

The image shows two screenshots from the PIN Settings menu. The left screenshot, titled 'My Panel PIN Settings', lists 'PIN User 1' with the code 'user1,1234' and 'SMS Keyword' with the value 'PROG'. The right screenshot, titled 'Edit Pin/User Data', shows input fields for 'User Name' (set to 'user1') and 'PIN Code' (set to '1234'). A red text warning states: 'User PIN Code 1 is also used as SMS PIN Code. Changing User PIN Code 1 will also change the PIN Code used to send SMS command shown in Edit Panel.' A blue circle highlights the 'Save' button in the top right corner of the 'Edit Pin/User Data' screen.

Delete the User PIN code by keeping the input field blank and save the setting. User PIN Code 1 cannot be deleted.

1.7. Alarm Setting

The Alarm Setting Menu allows you to edit alarm related configuration.

Select the option you want to edit. Slide the screen to select the value you want to change, press **Back** to return to menu when done.

The image shows two screenshots from the Alarm Settings menu. The left screenshot, titled 'Alarm Settings', lists various settings like 'Exit Delay Timer' (30 secs), 'Exit Delay Volume' (low), 'Entry Delay Timer' (20 secs), 'Entry Delay Volume' (low), 'Alarm Length' (3 mins), 'Door Chime Volume' (disable), 'Jamming Function' (disable), 'High Temperature Alarm' (disable), and 'Low Temperature Alarm' (disable). The right screenshot, titled 'Exit Delay Timer', shows the 'Current setting' as 30 seconds. A blue circle highlights the 'Back' button in the top left corner of the 'Exit Delay Timer' screen.

When you are satisfied with all of your alarm settings, press **Save**. A new SMS message will be created. Send the SMS message to execute the new settings in the control panel.

1.8. Reporting Setting

The Report Setting Menu allows you to edit your telephone numbers for reporting.

Select the reporting priority you want to edit. Enter the telephone number for reporting, and select report type and events. Only SMS(CID), SMS(Text), GSM CID and Voice reporting options are available.

The image shows two screenshots from the Reporting Setting menu. The left screenshot, titled 'My Panel Reporting Settings', lists 'Reporting 1' through 'Reporting 6'. The right screenshot, titled 'Reporting 1', shows input fields for 'SIM' (+88612345678), 'Type' (SMS), and 'Events' (Alarm, Status, All). A blue circle highlights the 'Save' button in the top right corner of the 'Reporting 1' screen.

Press **Save**. A new SMS message will be created. Send the SMS message to execute the new settings in the control panel.

You can delete the telephone number by keeping the telephone number field blank and save the setting.

1.9. Edit Device

The Edit Device option allows you to edit a device name, and attribute for Door Contact, PIR and EIR Sensor.

Select the Zone number of the device you want to edit and enter a new name. For Door Contact, PIR Sensor, PIR Camera and PIR Video Camera, please select an attribute. (Only Burglar, Home Omit and Entry attributes are available.)

For other devices without attribute, you can select any attribute as it will not affect the device setting.

Press **Save**. A new SMS message will be created. Send the SMS message to execute the new settings in the control panel.

The image shows two screenshots from the Edit Device menu. The left screenshot, titled 'My Panel Device Settings', lists 'Edit Device', 'Siren Control', 'PSS Control', and 'Capture Image'. The right screenshot, titled 'Edit Device', shows input fields for 'Zone' (1 ~ 30), 'Name' (office PSS), and 'Attribute' (burglar/home/entry). A red button labeled 'Delete This Device' is visible. A blue circle highlights the 'Save' button in the top right corner of the 'Edit Device' screen.

You can also press **Delete This Device** to remove the device in selected zone from the Control Panel.

1.10. Siren Control

The Siren Control option allows you to change Siren settings. Select the function you want to edit and choose to enable or disable the function.

My Panel Device Settings

- Edit Device
- Siren Control
- PSS Control
- Capture Image

Back Siren Control Send

Attribute: Tamper

Enable? Yes/No

Done Attribute

Tamper

Confirm

Entry/Exit

Learn RP

Press **Send**. A new SMS message will be created. Send the SMS message to execute the new settings in the control panel.

1.11. PSS Control

The PSS Control option allows you to turn on/off your Power Switch groups.

Select the Power Switch group you want to control, then choose to turn on/off the Power Switch.

My Panel Device Settings

- Edit Device
- Siren Control
- PSS Control
- Capture Image

Back PSS Control Save

PSS channel: 1~4

Action: On

Done

Attribute On

Off

Learning

Press **Save**. A new SMS message will be created. Send the SMS message to execute the command in the control panel.

PSS learning is not available with Vesta EZ Home.

1.12. Capture Image

You can manually request your PIR Camera, PIR Video Camera or IP Camera to take a picture or video. The picture will be sent to the destination programmed under Media Upload section.

Specify the zone number of the PIR Camera you want to take picture, then press **Capture Image**. A new SMS message will be created. Send the SMS message to execute the command in the control panel.

My Panel Device Settings

- Edit Device
- Siren Control
- PSS Control
- Capture Image

Back Capture Image

Zone: 1 ~ 30

Capture Image

1.13. Home Automation Rules

Select the condition, you will enter the rule setting page for the condition.

Choose to enable/disable the rule, Power Switch group on/off status and duration. For High and Low temperature, you also need to set the temperature value.

Press **Save**. A new SMS message will be created. Send the SMS message to execute the new settings in the control panel.

My Panel HA Settings

- If panel is set to Arm
- If panel is set to Home
- If panel is set to Disarm
- If temperature is greater than 50°C
- If temperature is less than -5°C

Back HA Rule Save

Enable Rule? No

PSS Channel: 4

Switch: On

Duration: Always

Alarm:

- Burglar
- Fire
- Water
- Emergency
- Panic

For system mode change (Arm, Home, Disarm), the Power Switch group selection is limited to 1 only.

For High/Low Temperature and Time setting. You can select any Power Switch group from 1-4.

2.1. Vesta EZ Home for Android


The Android version of Vesta EZ Home Application supports complete SMS command functions, including the commands to inquire Control Panel setting and update application data with latest setting information.

Select the Vesta EZ Home icon to start the application.



2.2. Add New Panel

Upon starting the application, you will first enter the Panel Selection menu. For first time user, you need to first enter your panel information, please select **ADD**.

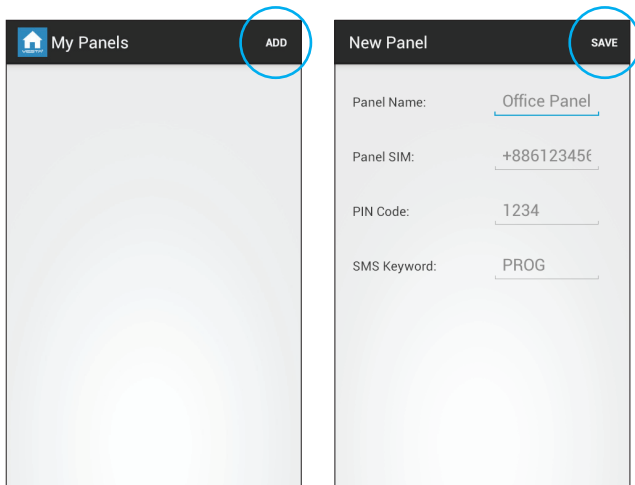


Enter the panel information. Press **SAVE** to save and confirm

You will now return to Panel Selection menu. The new panel you have entered will be displayed in the list. Select the panel to proceed to edit SMS commands for the panel.

The PIN Code and SMS Keyword entered in Panel Information are included in every SMS command sent with the app for the Control Panel to verify the SMS command

2.3. Edit Panel


You can edit your control panel information by pressing **EDIT**.

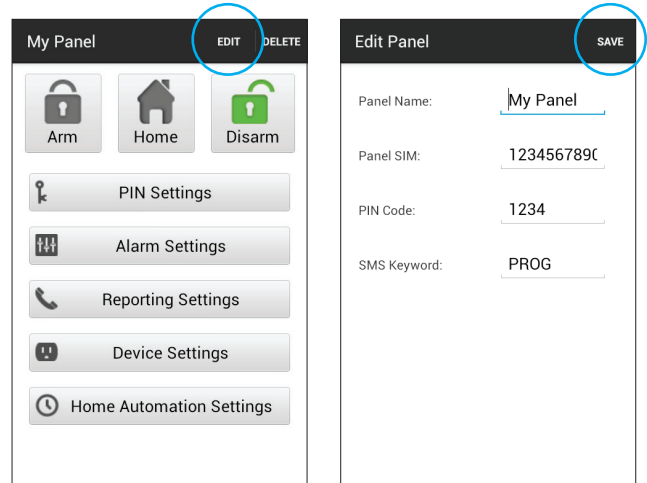

Enter the panel information. Press **SAVE** to save and confirm.


2.4. Remove Panel

If you want to remove the panel, press **DELETE**. Press **OK** to save and confirm.

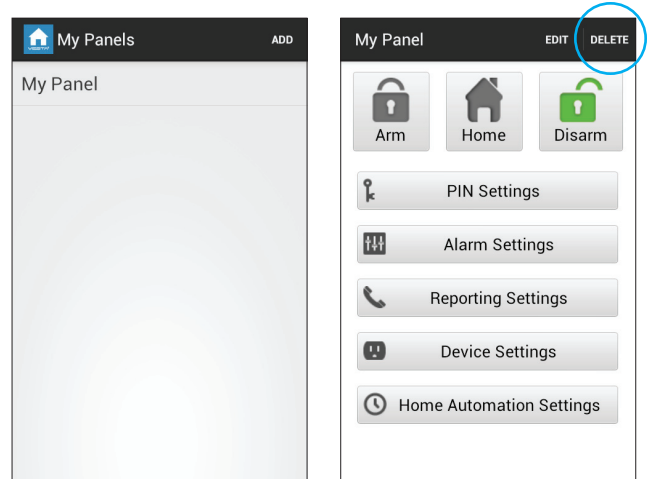

2.5. Away Arm / Home Arm / Disarm

To change system mode, select the icon for **Arm**, **Home** or **Disarm**. The application will send a SMS command to the control panel and execute the command.

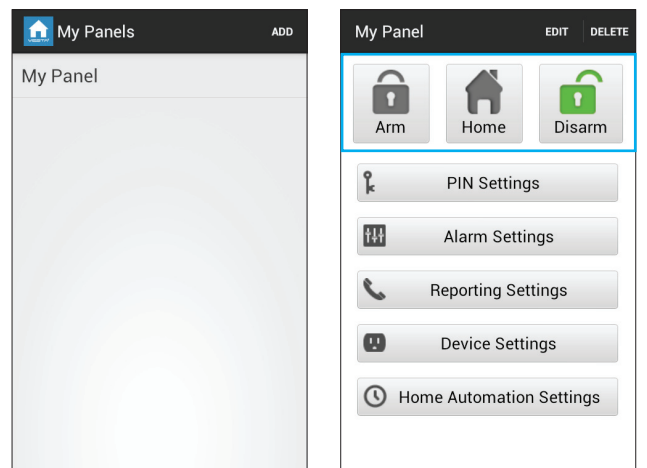

2.6. PIN Setting

The PIN Setting Menu allows you to edit User PIN Codes and SMS Keyword.

Select the information you want to edit, enter the information and press **SAVE**. The application will send a SMS command to the control panel and execute the command.

PIN Settings

PIN User 1

PIN User 1

PIN User 2

PIN User 3

PIN User 4

SMS Keyword

User Name: user1

PIN Code: 1234

User PIN Code 1 is also used as SMS PIN Code. Changing User PIN Code 1 will also change the PIN Code used to send SMS command shown in Edit Panel.

Delete the User PIN code by keeping the input field blank and save the setting. User PIN Code 1 cannot be deleted.

2.7. Alarm Setting

The Alarm Setting Menu allows you to edit alarm related configuration.

Select the option you want to edit. Slide the screen to select the value you want to change.

Alarm Settings

Exit Delay Timer 30 secs

Exit Delay Volume low

Entry Delay Timer 20 secs

Entry Delay Volume low

Alarm Length 3 mins

Door Chime Volume disabled

Jamming Function disabled

High Temperature Alarm disabled

Low Temperature Alarm disabled

Exit Delay Timer 30 secs

Exit Delay Volume 0 sec

Entry Delay Timer 10 secs

Entry Delay Volume 20 secs

Alarm Length 30 secs

Door Chime Volume 40 secs

Jamming Function 50 secs

High Temperature Alarm 60 secs

Low Temperature Alarm 70 secs

When you are satisfied with all of your alarm settings, press **SAVE**. The application will send a SMS command to the control panel and execute the command.

2.8. Reporting Setting

The Report Setting Menu allows you to edit your telephone numbers for reporting.

Select the reporting priority you want to edit. Enter the telephone number for reporting, and select report type and events. Only SMS(CID), SMS(Text), GSM CID and Voice reporting options are available.

Reporting Settings

Reporting 1

Reporting 2

Reporting 3

Reporting 4

Reporting 5

Reporting 6

Phone Number: +8861234567

Type: SMS

Events: Alarm

Press **SAVE**. The application will send a SMS command to the control panel and execute the command.

You can delete the telephone number by keeping the telephone number field blank and save the setting.

2.9. Edit Device

The Edit Device option allows you to edit a device name, and attribute for Door Contact, PIR Sensor and PIR Camera.

Select the Zone number of the device you want to edit and enter a new name. For Door Contact, PIR Sensor and PIR Camera, please select an attribute. (Only Burglar, Home Omit and Entry attributes are available.)

For other devices without attribute, you can select any attribute as it will not affect the device setting.

Press **SAVE**. The application will send a SMS command to the control panel and execute the command.

Device Settings

Edit Device

Siren Control

PSS Control

Capture Image

Zone: 1

Attribute: Burglar

Name: device A

Device Type: Unknown

Delete This Device

You can also press **Delete This Device** to remove the device in selected zone from the Control Panel.

2.10. Siren Control

The Siren Control option allows you to change Siren settings. Select the function you want to edit and choose to enable or disable the function.

The left screenshot shows the 'Device Settings' menu with 'Siren Control' selected. The right screenshot shows the 'Siren Control' settings page with 'Enable?' set to 'Yes' and 'Attribute' set to 'Tamper'. A 'SAVE' button is circled in red in the top right corner of the right screenshot.

Press **SAVE**. The application will send a SMS command to the control panel and execute the command.

2.11. PSS Control

The PSS Control option allows you to turn on/off your Power Switch groups.

Select the Power Switch group you want to control, then choose to turn on/off the Power Switch.

The left screenshot shows the 'Device Settings' menu with 'PSS Control' selected. The right screenshot shows the 'PSS Control' settings page with 'PSS Channel' set to '1' and 'Action' set to 'On'. A 'SAVE' button is circled in red in the top right corner of the right screenshot.

Press **SAVE**. The application will send a SMS command to the control panel and execute the command.

PSS learning is not available with the Vesta EZ Home.

2.12. Capture Image

You can manually request your PIR Camera, PIR Video Camera or IP Camera to take a picture or video. The picture will be sent to the destination programmed under Media Upload section.

Specify the zone number of the PIR Camera you want to take picture, then press **SAVE**. The application will send a SMS command to the control panel and execute the command.

The left screenshot shows the 'Device Settings' menu with 'Capture Image' selected. The right screenshot shows the 'Capture Image' settings page with 'Area' set to 'Area 1' and 'Zone' set to '1'. A 'SAVE' button is circled in red in the top right corner of the right screenshot.

2.13. Home Automation Rules

Select the condition, you will enter the rule setting page for the condition.

Choose to enable/disable the rule, Power Switch group on/off status and duration. For High and Low temperature, you also need to set the temperature value.

Press **SAVE**. The application will send a SMS command to the control panel and execute the command.

The left screenshot shows the 'Home Automation Settings' menu with 'If panel is set to Arm' selected. The right screenshot shows the 'Home Automation Settings' page with 'Enable Rule?' set to 'No', 'PSS Channel' set to '1', 'Switch' set to 'Off', and 'Duration' set to 'Always'. A 'SAVE' button is circled in red in the top right corner of the right screenshot.

For system mode change (Arm, Home, Disarm), the Power Switch group selection is limited to 1 only.

For High/Low Temperature and Time setting. You can select any Power Switch group from 1-4.