

Outdoor Junction Box and Extension Lead Set


Art.no 18-2971

Please read the entire instruction manual before using the product and then save it for future reference. We reserve the right for any errors in text or images and any necessary changes made to technical data. In the event of technical problems or other queries, please contact our Customer Services.

Safety


- This product has an ingress protection rating of IP54 only when the junction box is closed and the product is used as described in this instruction manual. Follow the directions in this instruction manual in order to ensure that the product is used correctly.
- Make sure that the load devices you are intending to connect the product to are switched off.
- The lid of the junction box must be closed and locked and the cable entries and seals must be intact.
- The cable entries must **not** be facing upwards.
- Any electrical cables connected to the sockets inside the junction box must have a cable diameter of 6.9–10.5 mm.
- The product is **only** intended for temporary use. It can be used over an extended period but is **not** designed for continuous use and must **not** be used permanently or be incorporated in a fixed installation.

Instructions for use

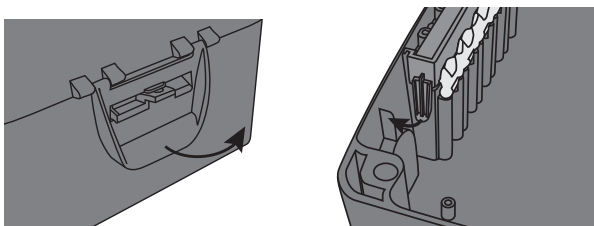



1. Open the junction box.
2. Remove the cable seal by opening the catches (one on each side) and lifting the seal off.
3. Attach the included multi-socket extension lead to the bottom of the junction box using the supplied fastener strip.
4. Lay the cable of the multi-socket extension lead into one of the cable entry cut-outs.

5. Plug the load devices into the sockets of the extension lead and lay their cables into the cable entry cut-outs.
6. Refit the cable entry seal, making sure that it is completely sealed and fastened with the catches.
7. Plug the multi-socket extension lead into a wall socket.
8. Close the lid of the junction box and make sure that it is locked properly.

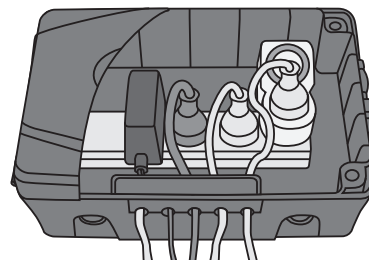


Example:

 Handy tip: Secure the lid of the junction box with a padlock to prevent tampering.




Extra cable entries


Two additional drill-out cable entry holes have been marked on the front of the junction box should you require extra cable entries. If the extra cable entries are used, care must be taken to maintain the junction box weather-resistance by using cable glands or grommets.



Wall mounting

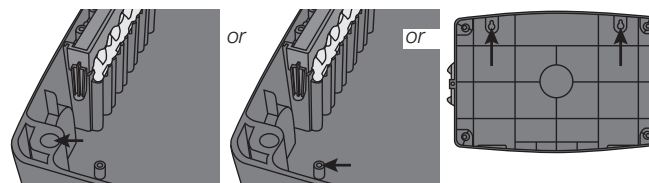


To mount the junction box on a wall, first hold the box against the wall as a template and mark out where you need to drill holes. The junction box also has two hanging holes on the back.

 Before drilling and screwing, make sure that the wall is free from electrical wiring and water pipes. Use an appropriate fastening method for the substrate material in question.


Timer

The included timer plug can be either be connected to a wall socket to control the entire extension lead in the junction box or connected to one of the sockets inside the junction box.

1. Begin by pulling up all the tappets before setting the timer.
2. Push down the tappets corresponding to the time period you wish the timer to switch on the load device.
3. Turn the time dial until the arrow points to the current time.
4. Make sure that the timer is set to Timer Mode, slide the switch to "B".
 - A: On
 - B: Timer Mode



Example: The current time is 15:30 (3.30 p.m.) and the timer is set to switch the load device on at 17:30 (5.30 p.m.) and off at 22:30 (10.30 p.m.).



Care and maintenance

Clean the product using a damp cloth. Use only mild cleaning agents, never solvents or corrosive chemicals.

Responsible disposal

This symbol indicates that this product should not be disposed of with general household waste. This applies throughout the entire EU. In order to prevent any harm to the environment or health hazards caused by incorrect waste disposal, the product must be handed in for recycling so that the material can be disposed of in a responsible manner. When recycling your product, take it to your local collection facility or contact the place of purchase. They will ensure that the product is disposed of in an environmentally sound manner.



Specifications

Operating temperature	–5 to +60 °C
IP rating	IP54 (if the box is closed)
Size	35 × 23 × 13 cm